

Common Tiling Scenarios - Floors

CONCRETE-CEMENT/SAND SUBFLOORS


- Tiling to concrete or cement/sand screed - dry areas
- Internal floors



1. Prepare the floor to remove any contaminants liable to impair adhesion.

2. If required, smooth the floor using **ARDITEX NA Ultra Rapid Setting Latex Levelling Compound** at a thickness of between 2mm and 12mm neat, or up to 30mm with the inclusion of **ARDEX Coarse Aggregate**.

3. Fix the tiles to the floor using **ARDEX MICROTEC X 7001 Flexible Rapid Drying Pourable Floor Tile Adhesive**.

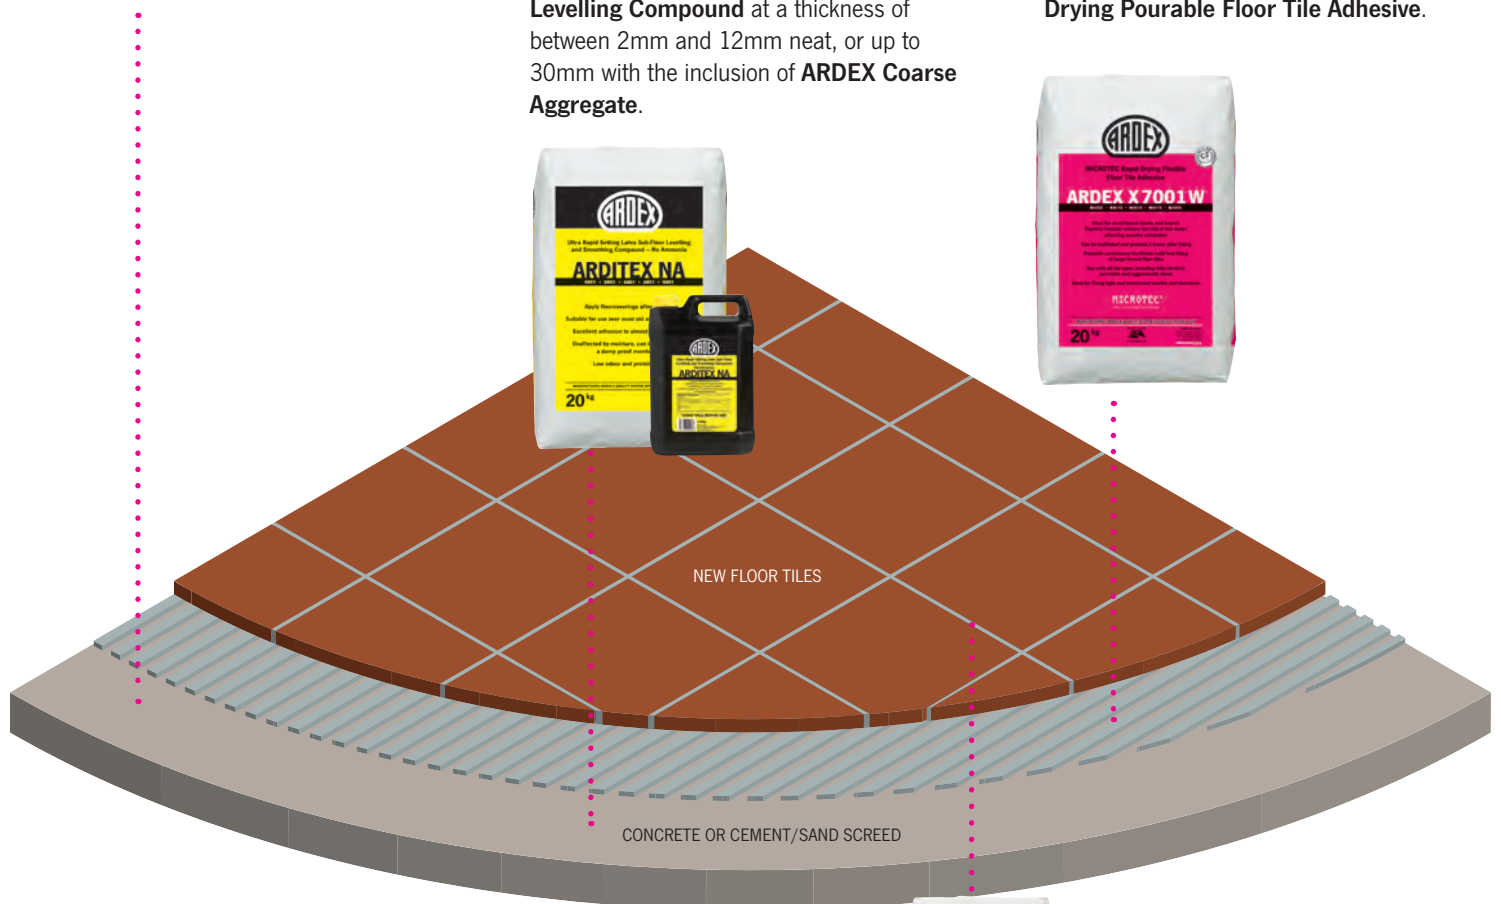

4. Grout the joints using **ARDEX-FLEX FL Flexible Tile Grout**.

For areas where greater chemical resistance is required, **ARDEX EG 8 PLUS Epoxy Tile Grout** can be used. Finish with **ARDEX ST Elastic Silicone Sealant** where required.

VogueCeramics

ARDEX Technical Support



Contact:
Andrew Reid
07966 646231
A.Reid@ardex.co.uk

Contact:
Ricky McNamara
07966 646232
R.Mcnamara@ardex.co.uk