

# Common Tiling Scenarios - Walls

## EXTERNAL WALLS

### • Tiling to external walls




1. Install a proprietary tile backing board to the external wall as per the manufacturer's instructions.

2. Fix the tiles to the proprietary tile backing board using **ARDEX MICROTEC X 77 Flexible Wall & Floor Tile Adhesive**.

3. Grout the joints using **ARDEX-FLEX FL Flexible Tile Grout**.

For areas where greater chemical resistance is required, **ARDEX EG 8 PLUS Epoxy Tile Grout** can be used. Finish with **ARDEX ST Elastic Silicone Sealant** where required.

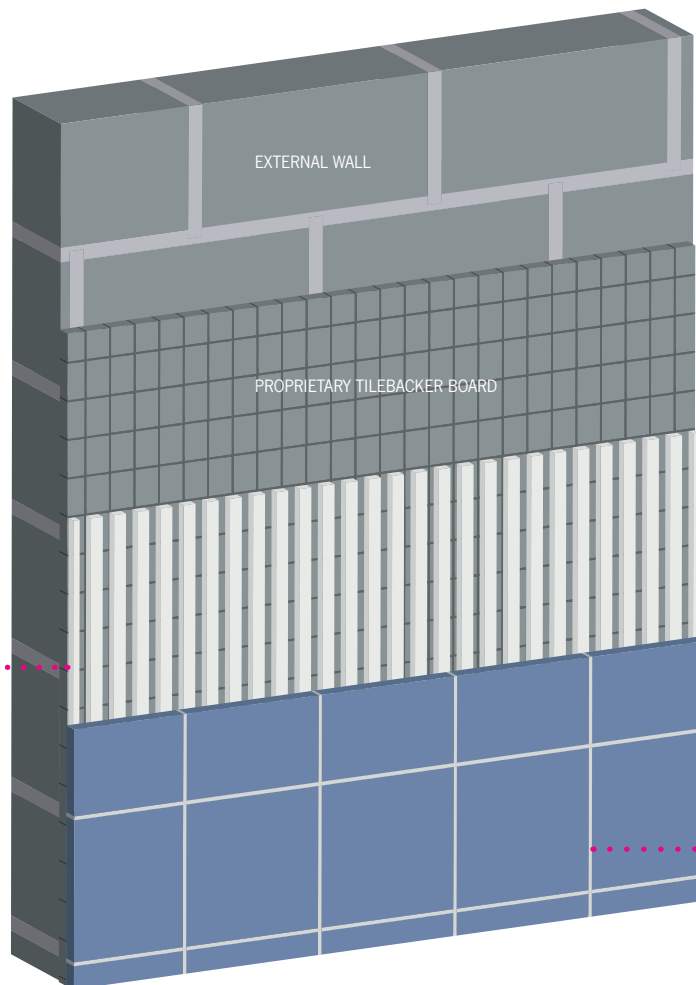

VogueCeramics

# ARDEX Technical Support



**Contact:**  
**Andrew Reid**  
**07966 646231**  
**A.Reid@ardex.co.uk**

**Contact:**  
**Ricky McNamara**  
**07966 646232**  
**R.Mcnamara@ardex.co.uk**